


SECTION A

NOTE:
SEAL ANY GAPS BETWEEN SECONDARY VENT COVER
& SURROUNDING TILES USING LOCALLY-APPROVED
CLASS A SEALANT

O'HAGIN'S VENTS ARE MANUFACTURED USING:
- PRE-PAINTED GALVANIZED 26 GAUGE G90
(CALL FOR COLOR SELECTIONS/AVAILABILITY)
- GALVANIZED 26 GAUGE G90
- ALUMINUM .032
- COPPER 16 OZ

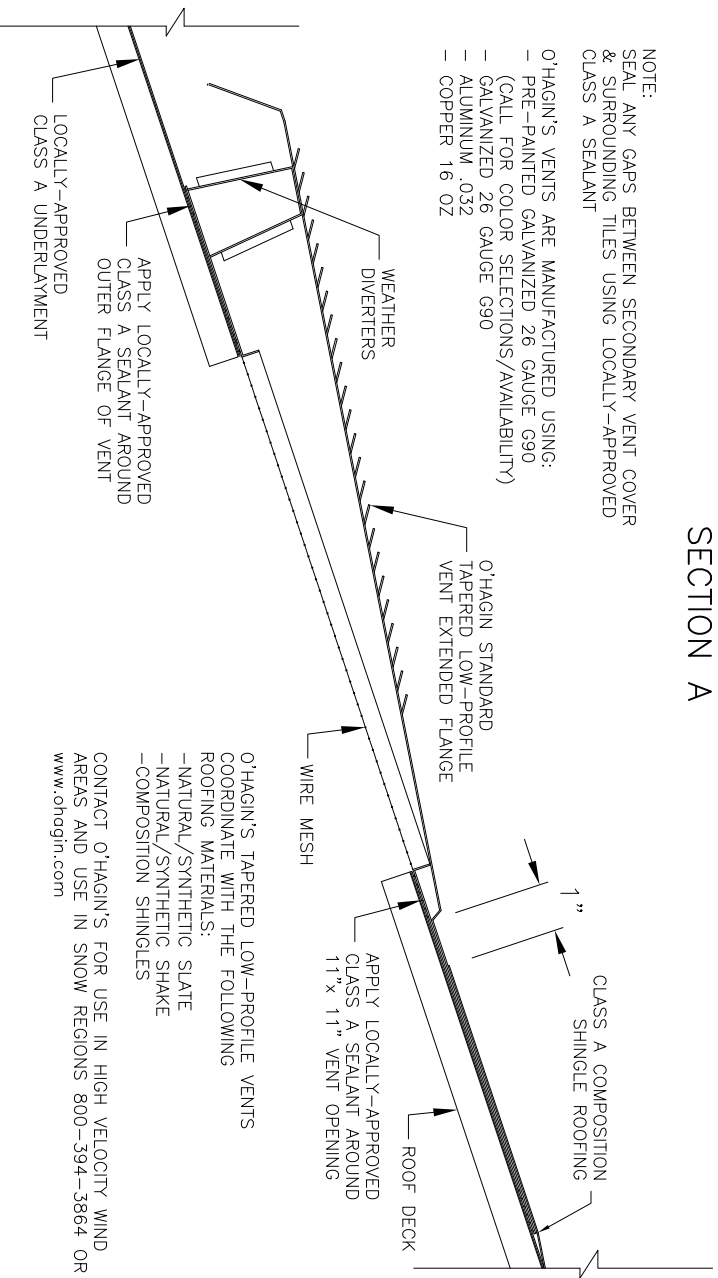

LOCALLY-APPROVED CLASS A UNDERLAYMENT

APPLY LOCALLY-APPROVED CLASS A SEALANT AROUND OUTER FLANGE OF VENT

O'HAGIN'S TAPERED LOW-PROFILE VENTS COORDINATE WITH THE FOLLOWING ROOFING MATERIALS:
- NATURAL/SYNTHETIC SLATE
- NATURAL/SYNTHETIC SHAKE
- COMPOSITION SHINGLES

CONTACT O'HAGIN'S FOR USE IN HIGH VELOCITY WIND AREAS AND USE IN SNOW REGIONS 800-394-3864 OR www.ohagin.com

