


SECTION A

NOTE:
SEAL ANY GAPS BETWEEN SECONDARY VENT COVER
& SURROUNDING TILES USING LOCALLY-APPROVED
CLASS A SEALANT

- O'HAGIN'S FIRE & ICE® VENTS ARE MANUFACTURED USING:
- PRE-PAINTED GALVANIZED 26 GAUGE G90
 - (CALL FOR COLOR SELECTIONS/AVAILABILITY)
 - GALVANIZED 26 GAUGE G90
 - ALUMINUM .032
 - COPPER 16 OZ

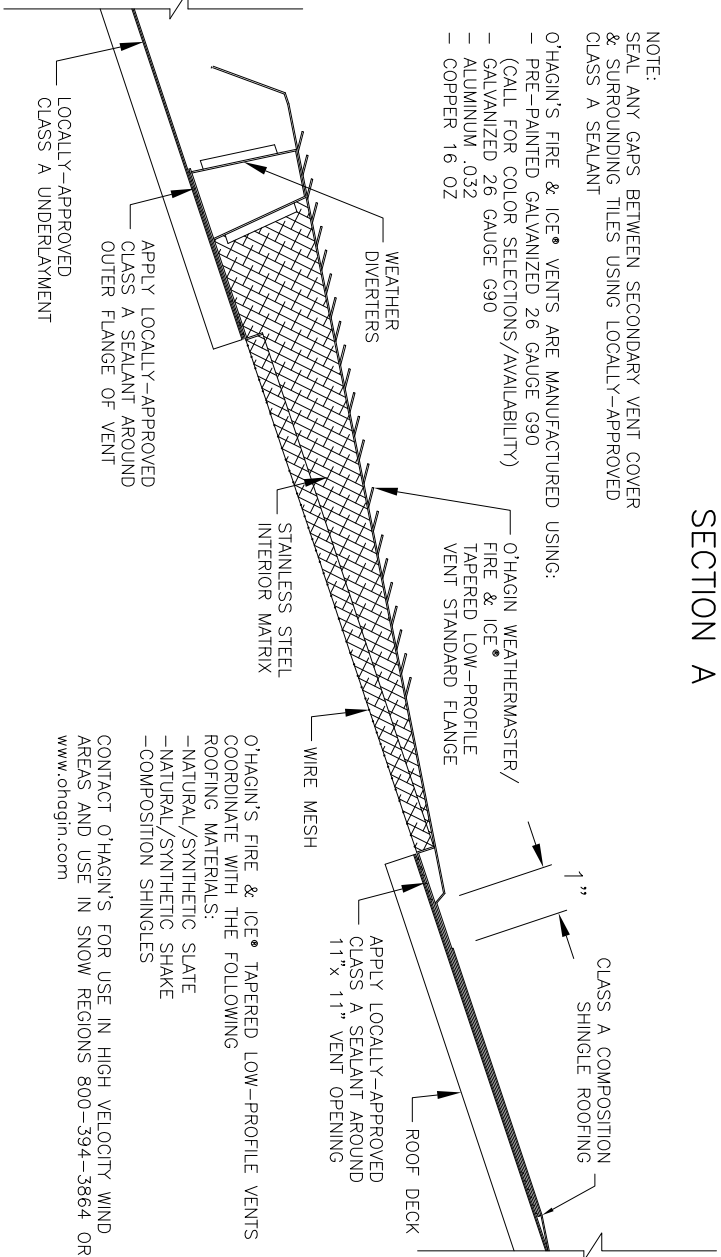

O'HAGIN'S FIRE & ICE® TAPERED LOW-PROFILE VENTS
COORDINATE WITH THE FOLLOWING
ROOFING MATERIALS:
- NATURAL/ SYNTHETIC SLATE
- NATURAL/ SYNTHETIC SHAKE
- COMPOSITION SHINGLES

CONTACT O'HAGIN'S FOR USE IN HIGH VELOCITY WIND
AREAS AND USE IN SNOW REGIONS 800-394-3864 OR
www.ohagin.com

