



O'HAGIN FIRE&ICE 1/8" WIRE MESH RETROFIT INSTALLATION INSTRUCTIONS FOR CLAY TILE ROOF APPLICATIONS

O'Hagin FIRE&ICE® Attic Vent Retrofit Program is designed to upgrade existing vents for tile with our new FIRE&ICE® solutions. Please read and follow these instructions carefully.


CLAY HIGH PROFILE "S"

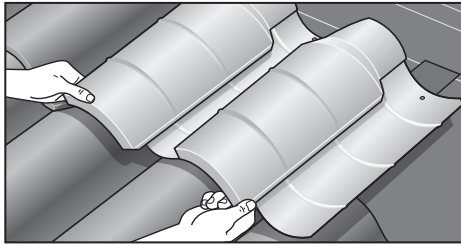


1. REMOVE surrounding roof tiles, existing secondary vent (cover) and any debris on or near the primary vent (subflashing).

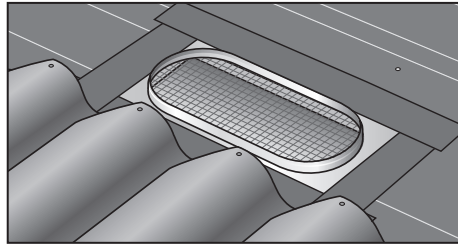


2. INSPECT existing subflashing has been properly installed in accordance with manufacturer's installation instructions. (See No. 1 in the **General Instruction Notes**.)




3A. PLACE the pre-cut section of 1/8" wire mesh within the interior lip of the subflashing.




B. APPLY the pre-cut section of the patented 3-D ember resistant stainless matrix within the interior of the lip of the subflashing, fully covering the wire mesh screens. (See No. 2 in the **General Instruction Notes**.)

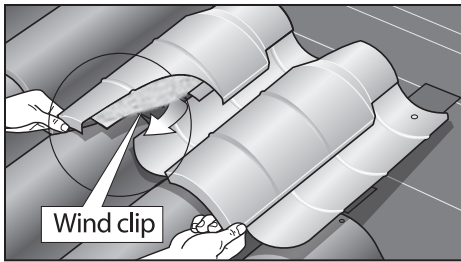

4. INSTALL the new FIRE&ICE® cover, bending the wind clip tightly under the preceding course of tile, adjusting for head lap.

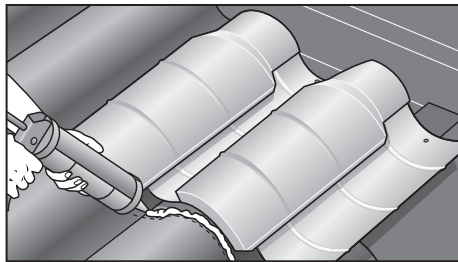


5. SEAL any gaps between FIRE&ICE® cover and surrounding tiles, as well as any fastener penetrations using locally-approved Class A sealant for flame and ember resistance.

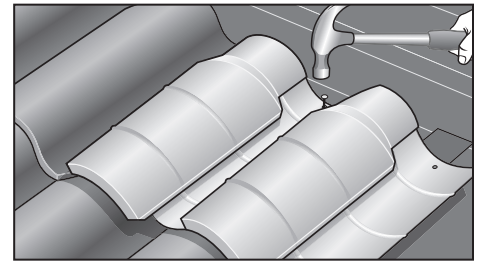


6. SECURE with locally-approved roofing nails or screws of sufficient length to penetrate sheathing.


CLAY MEDIUM PROFILE "M"

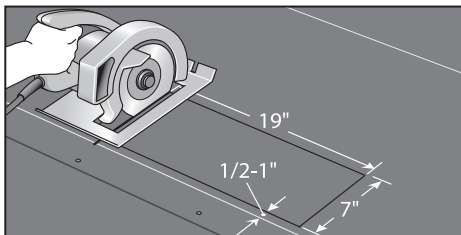

1. MARK & CUT primary vent (sub flashing) opening as shown. Align the bottom of the opening 1/2 to 1 inch above the pan tile layout line as shown. (NOTE: Set blade to the thickness of the sheathing.)

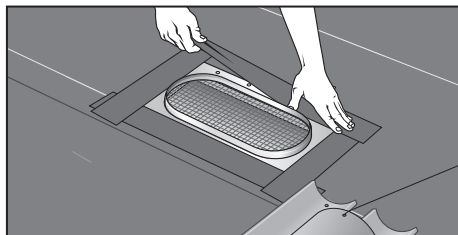


2. SEAL, ATTACH & FLASH as shown in Steps 2-4 of the 1-piece installation instructions. Apply field tile up to the sub flashing, nailing the wire into place.

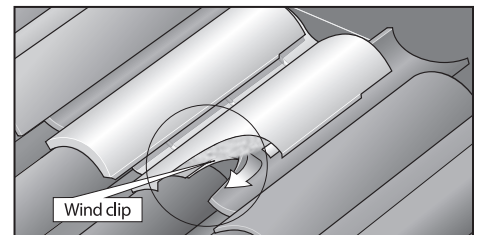

3. INSTALL the secondary vent (cover), which takes the place of 2 caps and 1 pan tile. Bend the wind clip tightly under the preceding course of tile, adjusting for head lap. Secure and seal as shown in Steps 4 and 6 of the High Profile "S" installation instructions.

CLAY LOW PROFILE "FLAT"

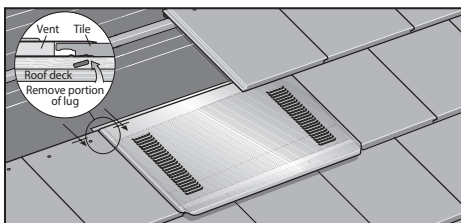

- Follow Steps 1-4 of the High Profile "S" installation instructions.
- Insert tile between louvered top of secondary vent (cover) and bottom flanged water channel (see insert). Remove 2 to 3 inches of the tile batten lug on either side of the cover for proper fit. For tiles with continuous lugs, a portion of the lug may be removed as needed for wind clip installation. The cover takes the place of two field tiles.
- Seal and Secure as shown in Steps 5 and 6 of the High Profile "S" installation instructions.

GENERAL INSTRUCTION NOTES:

- Depending on climate conditions and local best roofing practices, the following methods are acceptable: a) peel and stick; b) three-course and mastic; c) bib-over and mastic; d) membrane and mastic; or finally, e) any other locally approved waterproofing/sealing method. Any waterproof membrane should be held a minimum of 3/4 inch away of the primary vent as installed in Steps 1 through 4, at left, OR, in such a manner as to prevent the "ramping" of water and over waterproofing material and the raised lip of the primary vent. Prime metal on primary vent, as installed in Steps 1 through 4, at left, if using peel and stick method.
- When required by local ordinances, FIRE&ICE® vents with 1/4" wire mesh can be retrofitted; apply the pre-cut section of 1/8" wire mesh within the interior lip of the subflashing.
- Class A materials should be used on installation of FIRE&ICE® attic ventilation products where required by local code.
- Do not install vents below areas of concentrated water runoff, particularly if partially under, near, or adjacent to solar array installations. Placement assumes gutters are installed and are in good working order in all applicable areas.
- Standard installation at 3:12 pitch or greater.
- All low vents (intake) shall be uniformly installed a minimum of 6 inches above the attic insulation. The width of any eave overhang shall be taken into consideration so, for example, the insulation does not block the attic vent opening.
- All high vents (exhaust) shall be uniformly installed in the second or third course below the ridge assembly (at highest point possible—a minimum of one full course below the ridge) unless prevented by structural framing or other design limitations.
- O'Hagin vents are designed to be part of a complete roofing system. Failure to properly install all components will negatively impact overall performance and will void warranty protections.

210 Classic Court, Suite 100
Rohnert Park, CA 94928
Toll Free 877-324-0444
Fax 707-588-918
www.ohagin.com

O'HAGIN 
THE TECHNOLOGICAL LEADER IN ATTIC VENTILATION

