



O'HAGIN 1/8" CORROSION-RESISTANT WIRE MESH RETRO KIT INSTALLATION INSTRUCTIONS FOR CONCRETE TILE ROOF APPLICATIONS

O'Hagin Retrofit Program is designed to upgrade traditional vents. Please read and follow these instructions carefully.


CONCRETE HIGH PROFILE (S)

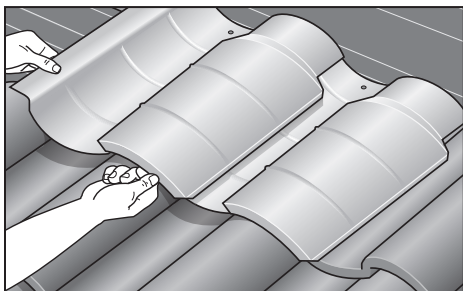


1. REMOVE surrounding roof tiles, existing secondary vent (cover) and any debris on or near the primary vent (subflashing).

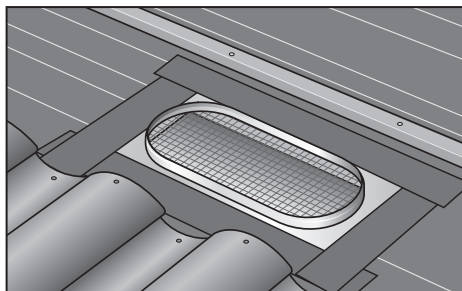


2. INSPECT existing subflashing to ensure it's been properly installed in accordance with manufacturer's installation instructions (See No. 2 in the **General Instruction Notes** below).




3A. PLACE the pre-cut section of 1/8" corrosion-resistant wire mesh within the interior lip of the subflashing.




B. APPLY the pre-cut section of the patented fine/flexible wire filament within the interior lip of the subflashing, fully covering the wire mesh screens. (For snow and fire protection).

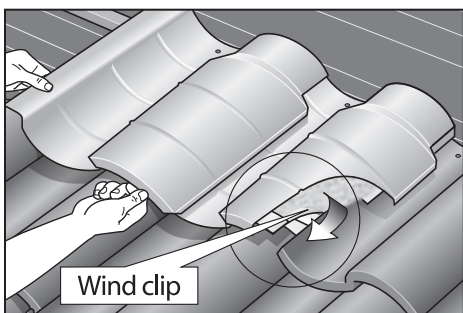

4. INSTALL the new secondary vent (cover), bending the wind clips tightly under the preceding course of tile, adjusting for head lap.



5A. SEAL top of roof tiles below and underside of secondary vent (cover) using locally-approved sealant.




B. SECURE with locally-approved roofing nails or screws of sufficient length to penetrate sheathing.

GENERAL INSTRUCTION NOTES:


- Class A materials should be used for best results.
- Depending on climate conditions and local best roofing practices, the following methods are acceptable: a) peel and stick; b) three-course and mastic; c) bib-over and mastic, d) membrane and mastic, or finally, e) any other locally-approved waterproofing/sealing method. Any waterproof membrane should be held a minimum of 3/4 inch away from the primary vent as installed in Steps 1 through 4, at left, OR, in such a manner as to prevent the "ramping" of water up and over waterproofing material and the raised lip of the primary vent. Prime metal on primary vent, as installed in Steps 1 through 4, at left, if using peel and stick method.

CONCRETE MEDIUM PROFILE (M)

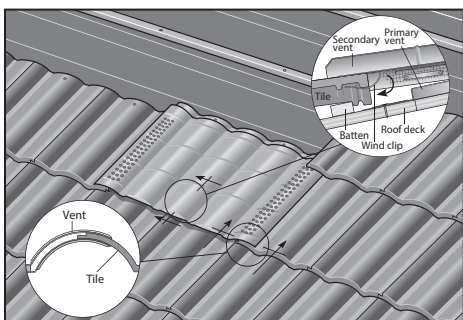

- Follow Steps 1-4 of the High Profile (S) installation instructions.
- Tile is then inserted between perforated top of secondary vent (cover) and bottom flanged water channel (see insert). Bend the wind clip tightly under the preceding course of tile, adjusting for head lap. The cover takes the place of two field tiles.
- Seal and Secure as shown in Step 5 of the High Profile (S) installation instructions above.

CONCRETE LOW PROFILE (FLAT)

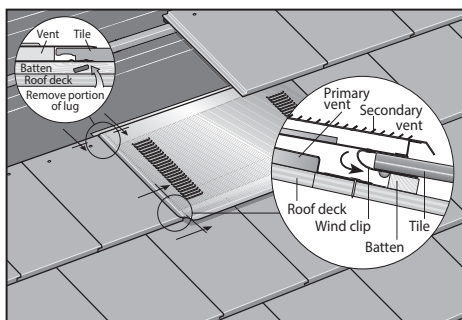

- Follow Steps 1-4 of the High Profile (S) installation instructions.
- Insert tile between louvered top of secondary vent (cover) and bottom flanged water channel (see insert). Bend the wind clip tightly under the preceding course of tile, adjusting for head lap. Remove 2 to 3 inches of the tile batten lug on either side of the cover for proper fit. For tiles with continuous lugs, a portion of the lug may be removed as needed for wind clip installation. The cover takes the place of two field tiles.
- Seal and Secure as shown in Step 5 above.

- Do not install vents below areas of concentrated water runoff, particularly if partially under, near, or adjacent to solar array installations. Placement assumes gutters are installed and are in good working order in all applicable areas.
- Standard installation at 3:12 pitch or greater.
- INTAKE vents are installed in the lower 1/3rd of the attic, a minimum of 6" above the attic insulation. The width of any eave overhang shall be taken into consideration so, for example, the insulation does not block the attic vent opening.

- EXHAUST vents are installed within 3' of the ridge assembly (at the highest point possible – a minimum of one full course below the ridge) unless prevented by structural framing or other design limitations.
- O'Hagin vents are designed to be part of a complete roofing system. Failure to properly install all components will negatively impact overall performance and will void warranty protections.

210 Classic Court, Suite 100
Rohnert Park, CA 94928
Toll Free 877-324-0444
Fax 707-588-918
www.ohagin.com

O'HAGIN
THE TECHNOLOGICAL LEADER IN ATTIC VENTILATION



**WATCH OUR
INSTALL VIDEOS**
Scan this QR Code
to watch easy
step-by-step install
videos.