



# O'HAGIN TRADITIONAL, FIRE & ICE AND WEATHER MASTER ATTIC VENTS INSTALLATION INSTRUCTIONS FOR CLAY TILE ROOF APPLICATIONS


## CLAY HIGH PROFILE (S)

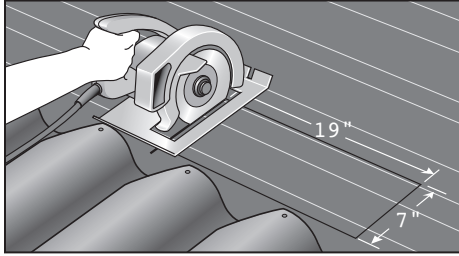


**1. MARK & CUT** a 19 inch x 7 inch hole in the roof deck, centered between layout lines and aligned approximately as shown on the exposure lines.

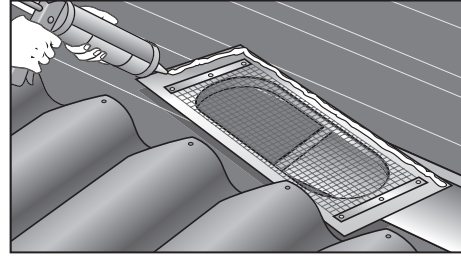


**2. SEAL** using a sufficient amount of locally-approved sealant around outer flange of primary vent.

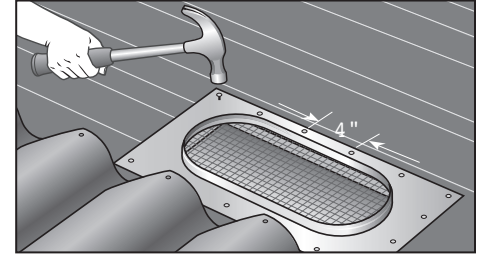


**3. ATTACH** subflashing at 4 inch centers, using locally-approved roofing nails or screws of sufficient length to penetrate the sheathing.

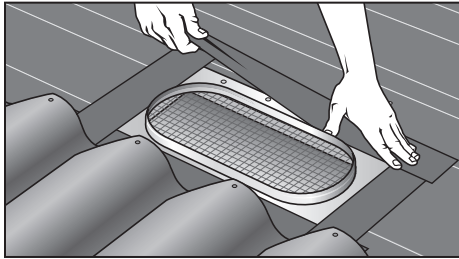

**4. FLASH** When using peel and stick or membrane and mastic methods, apply bottom strip first, then sides and finally the top strip. For proper drainage around the raised lip of the primary vent (subflashing) hold roofing material back a minimum of one finger width. (See No. 2 in the General Instruction Notes below.)

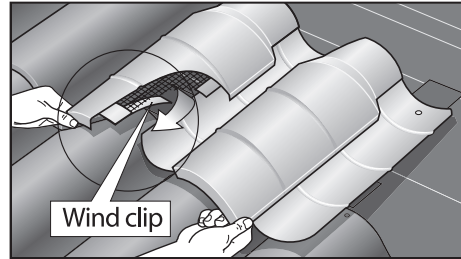


**5. INSTALL** the secondary vent (cover), bending the wind clips tightly under the preceding course of tile, adjusting for head lap.

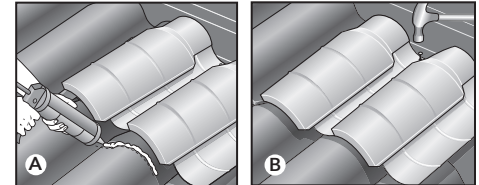


**6. A. SEAL** top of roof tiles below and underside of secondary vent (cover) using locally-approved sealant.  
**B. SECURE** with locally-approved roofing nails or screws of sufficient length to penetrate sheathing.


## CLAY MEDIUM PROFILE (M)

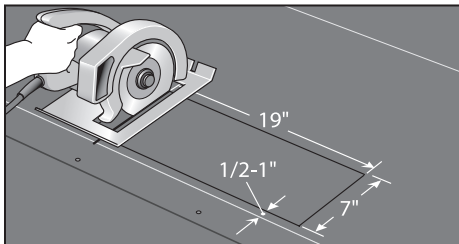

**1. MARK & CUT** primary vent (subflashing) opening as shown. Align the bottom of the opening 1/2 to 1 inch above the pan tile layout line as shown. (Note: Set blade to the thickness of the sheathing.)

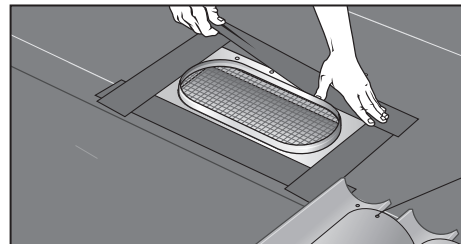


**2. SEAL, ATTACH & FLASH** subflashing as shown in Steps 2-4 of the High Profile (S) installation instructions. Apply field tile up to the subflashing, nailing the wire into place.

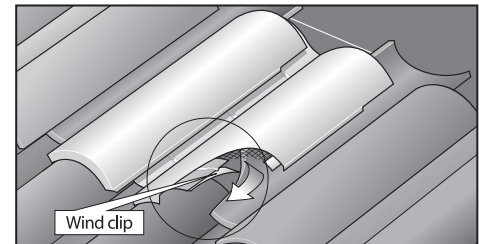

**3. INSTALL** the secondary vent, (cover) which takes the place of 2 caps and 1 pan tile. Bend the wind clips tightly under the preceding course of tile, adjusting for head lap. Seal and Secure as shown in Step 6 of the High Profile (S) installation instructions.

## CLAY LOW PROFILE (FLAT)

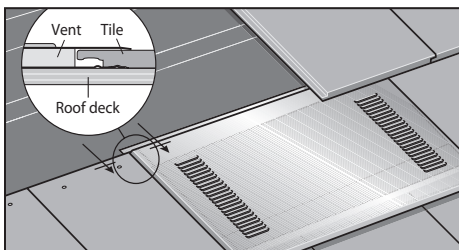

- Follow Steps 1-4 of the High Profile (S) installation instructions.
- Insert tile between louvered top of secondary vent (cover) and bottom flanged water channel (see insert). Remove 2 to 3 inches of the tile batten lug on either side of the cover for proper fit. For tiles with continuous lugs, a portion of the lug may be removed as needed for wind clip installation. The cover takes the place of two field tiles.
- Seal and Secure as shown in Step 6 of the High Profile (S) installation instructions.

### GENERAL INSTRUCTION NOTES:

- Class A materials should be used for best results.
- Depending on climate conditions and local best roofing practices, the following methods are acceptable: a) peel and stick; b) three-course and mastic; c) bib-over and mastic; d) membrane and mastic, or finally, e) any other locally-approved waterproofing/sealing method. Any waterproof membrane should be held a minimum of 3/4 inch away from the primary vent as installed in Steps 1 through 4, at left, OR, in such a manner as to prevent the "ramping" of water up and over waterproofing material and the raised lip of the primary vent. Prime metal on primary vent, as installed in Steps 1 through 4, at left, if using peel and stick method.
- Do not install vents below areas of concentrated water runoff, particularly if partially under, near, or adjacent to solar array installations. Placement assumes gutters are installed and are in good working order in all applicable areas.
- Standard installation at 3:12 pitch or greater.
- INTAKE vents are installed in the lower 1/3rd of the attic, a minimum of 6" above the attic insulation. The width of any eave overhang shall be taken into consideration so, for example, the insulation does not block the attic vent opening.
- EXHAUST vents are installed within 3' of the ridge assembly (at the highest point possible – a minimum of one full course below the ridge) unless prevented by structural framing or other design limitations.
- O'Hagin vents are designed to be part of a complete roofing system. Failure to properly install all components will negatively impact overall performance and will void warranty protections.

210 Classic Court, Suite 100  
Rohnert Park, CA 94928  
Toll Free 877-324-0444  
Fax 707-588-918  
www.ohagin.com

**O'HAGIN**   
THE TECHNOLOGICAL LEADER IN ATTIC VENTILATION



WATCH OUR  
INSTALL VIDEOS  
Scan this QR Code  
to watch easy  
step-by-step install  
videos.